


Editor

An editor for the Native-Function definition can be found here:
“cgi_studio_connector/bin/ComplexTypeEditor.exe”

If called with a file as first argument the editor will try to open the specified file.

Complex-Types

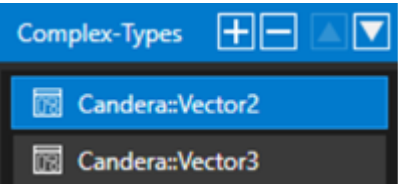

On the left side, Complex-Types can be added/removed and reordered using the respective buttons.

Properties:

Properties

Native Type	Candera::Vector2
Basic Type	Single
Length	2
Default Value	Candera::Vector2(0.0F, 0.0F)

☐ Dynamic

Property Name	Description
Native Type	C/C++ name of the native type
Basic Type	Basic type used to represent the Complex-Type. This type will be used when transferring data via the Interface.
Length	Length of the Complex-Type based on the Basic-Type. To use to a dynamic length (e.g. an array) the “Dynamic” checkbox can be used.
Default Value	Default value used for this Complex-Type.