
# Editor

An editor for the Native-Function definition can be found here:
“cgi_studio_connector/bin/ComplexTypeEditor.exe”


If called with a file as first argument the editor will try to open the specified file.

## Complex-Types

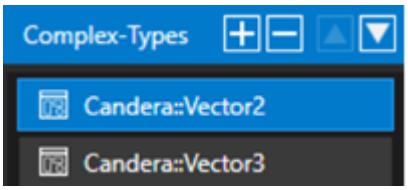


On the left side, Complex-Types can be added/removed and reordered using the respective buttons.

**Properties:**

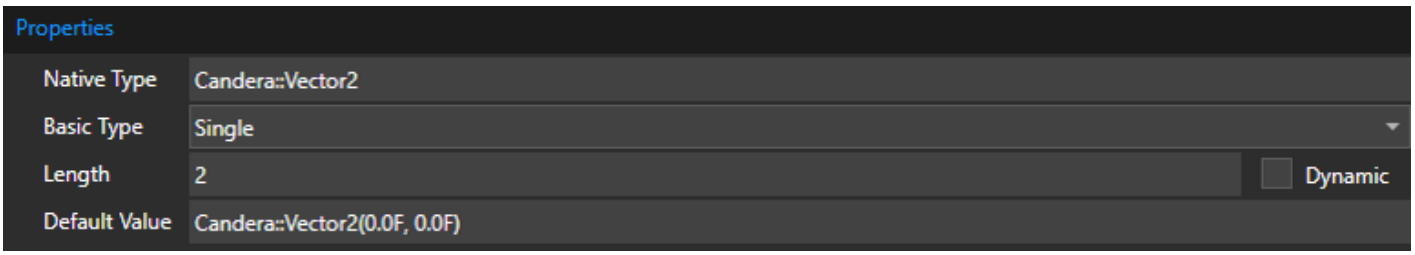


| Property Name | Description |
|---|---|
| **Native Type** | C/C++ name of the native type |
| **Basic Type** | Basic type used to represent the Complex-Type. This type will be used when transferring data via the Interface. |
| **Length** | Length of the Complex-Type based on the Basic-Type. To use to a dynamic length (e.g. an array) the “Dynamic” checkbox can be used. |
| **Default Value** | Default value used for this Complex-Type. |

Revision #3
Created 2024-10-07 03:31:50 UTC by Kanai Tomoaki
Updated 2025-04-14 04:05:29 UTC by Kanai Tomoaki